

## Cryogenic Bayonets

Cryocomp manufactures high quality cryogenic bayonets, needed for safe and efficient cryogenic transfer & piping systems. The bayonet is a mechanical joint which allows for the connection of sections of vacuum-jacketed/flex lines & pipe that can be dismantled and assembled easily in the field while maintaining low heat leak at the joint.

### CB700 Series Cryogenic Bayonets (Linde style)



*CB700 Male Bayonet*



*CB700 Female Bayonet*

The CB700 Series Cryogenic Bayonet design is a tube sized high-efficiency connection for vacuum insulated piping and transfer line applications. This series utilizes a threaded connection nut to facilitate easy connection and separation functions. A close tolerance seal design maximizes the efficiency and a silicone O-ring assures tight sealing at cryogenic temperatures. The bayonet is available in four lengths, 3", 6", 9" & 15" to interchange with new or existing installations. The CB700 will operate efficiently in the vertical or horizontal positions and is recommended for use with most cryogenic fluids including nitrogen, oxygen (with proper cleaning) argon and helium.

### B3000 Series Cryogenic Bayonets (Piping)



*B3000 Male Bayonet*



*Seal & V-Band*



*B3000 Female Bayonet*

Cryocomp bayonet assemblies offer low heat leak and quick solution field installation. Our B3000 Cryogenic Bayonet series is a high-efficiency tube & pipe connection for vacuum-jacketed transfer lines and vacuum insulated piping systems. The assemblies range from 1/2" tube to 1" pipe with a 150 PSI MAWP. The design utilizes an extremely close tolerance fit between the male and female components establishing a gas pocket (vapor lock) between the components to form a seal, which is at process stream temperature at one end and ambient at the other. The very small gas pocket and thin stainless elements contribute to the high-efficiency of the design. The close tolerance design eliminates the necessity of a nose seal. Other advantages are frost-free transfers, minimization of heat leak and easy disassembly. The pipe product line connects with a clamping system for continuous leak-free operation. Bayonet assemblies offer savings in terms of decreasing field assembly time and lower installation costs coinciding with low heat leak.



# Design The Perfect Bayonet


## CB700 Tube Size Linde Style Bayonets

### TECHNICAL DATA

- Will operate efficiently in the vertical or horizontal positions.
- Designed in four thermal lengths: 3" to interchange with existing Linde installations, 6", 9" and 15" to fit most thermal and physical criteria.
- Inner lines are tube size and available in 1/2" OD only. Adapters are available for 1/4" and 3/8".
- MAWP: 150 PSIG.
- Recommended for use with most cryogenic fluids including nitrogen, oxygen (with proper cleaning and seal material), argon, and helium.

### HEAT LEAK

Length	BTU/HR (set)
3"	21
6"	11
9"	7.2
15"	4.3

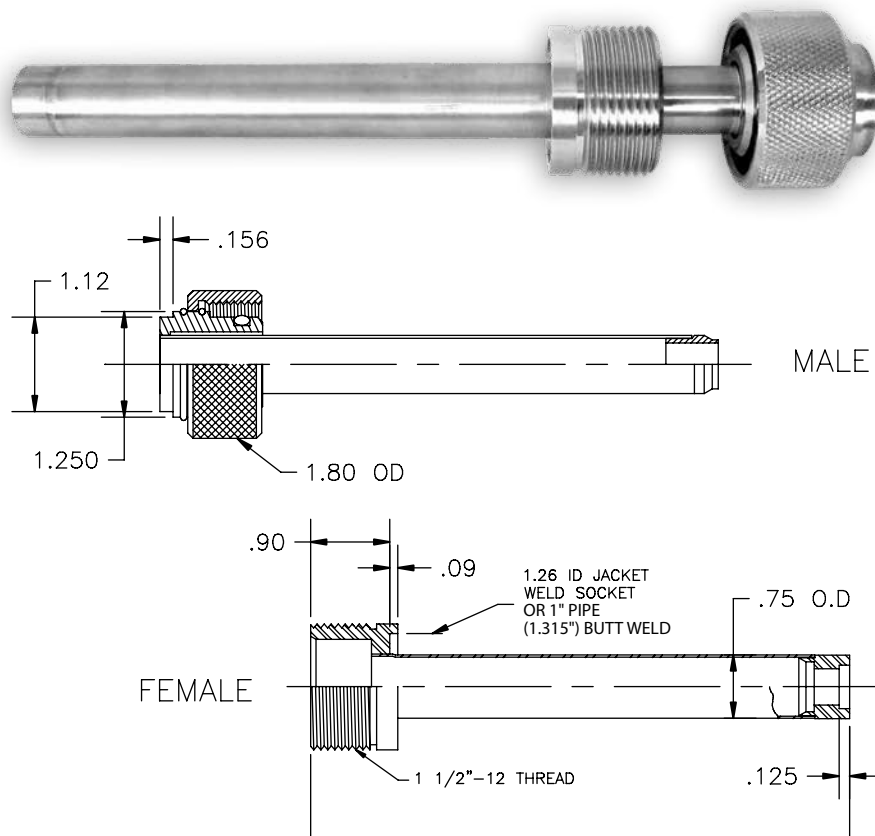

### Part Numbers

To specify the Linde style bayonet you'd like to order, select the features you require and build the part number using the option codes provided. See examples below. Call for more information or assistance designing your bayonet.

# CB700-0000B

#### DESIGN SERIES

All Linde Style Bayonets

#### SIZE (1/8")

1/4" (2/8) = 02  
3/8" (3/8) = 03  
1/2" (4/8) = 04  
3/4" (6/8) = 06\*

#### MATERIAL

Stainless = 5

#### GENDER

Male = M  
Female = F  
Set = S

#### LENGTH (STANDARDS)

3" Thermal Length = 3  
6" Thermal Length = 6  
9" Thermal Length = 9  
15" Thermal Length = 15

#### FUNCTION

Bayonet (standard) = B (or no number)  
VJ Cap or Plug with Pipe Outlet = A  
VJ Cap or Plug, Blank = C  
NJ Cap or Plug - pressure only, no cryo = D  
NJ Cap or Plug with 1/4" FPT - pressure only, no cryo = E  
Protective Cover - usually plastic, vented code = P

#### Product Number Examples:

VJ Plug, Blank for 1/2" x 3" Female Bayonet = CB704-5M3C

VJ Cap for 1/2" x 6" Male Bayonet with Pipe Outlet = CB704-5F6A

\* 3/4" bayonet only available in 9" & 15" thermal length




sales@cryocomp.com ▼ 908.686.3643 ▼ www.cryocomp.com

# B3000 Series Pipe Size Bayonets


## TECHNICAL DATA

- Highly efficient and reliable close tolerance design for vertical or horizontal applications.
- Designed for fast and convenient installation for piping fabricators.
- No clamshell required.
- MAWP: 300 PSIG.  
Proof: 450 PSIG.
- All internal components leak tested to  $1 \times 10^{-9}$  SCC GHe/SEC.
- Convenient v-band closure.

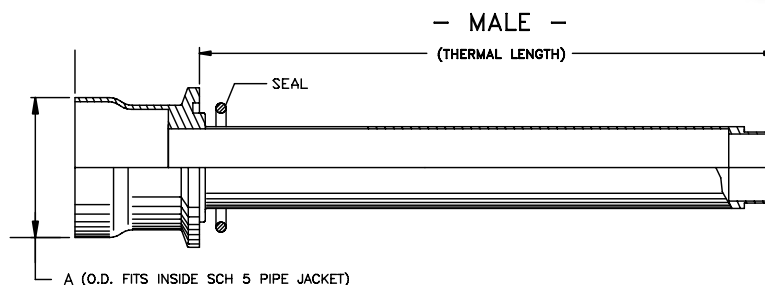

## HEAT LEAK

Length - Pipe Size	BTU/HR
9"	8.4
12" - 1/2" & 3/4" Pipe	11.2 @78K
12" - 1" Pipe	18.1 @78K

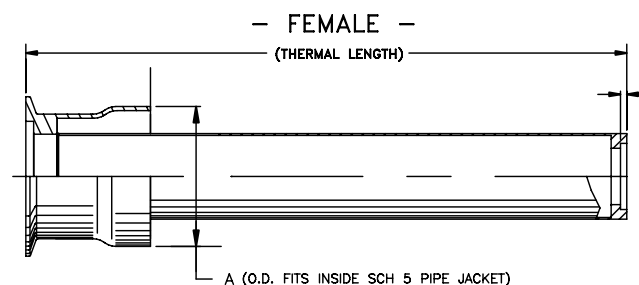

## Part Numbers

To specify the bayonet you'd like to order, select the features you require and build the part number using the option codes provided. See examples below. Call for more information or assistance designing your bayonet.

# B3000-0B

### DESIGN SERIES

B3000 Series = B3

### SIZE (1/8")

1/2" (Pipe) = 04  
3/4" (Pipe) = 06  
1" (Pipe) = 08

### LENGTH (STANDARDS)

9" Thermal Length = 9  
12" Thermal Length = 12

### GENDER

Male = M  
Female = F  
Set = S

### FUNCTION

Bayonet (standard) = B  
VJ Cap or Plug with Pipe Outlet = A  
VJ Cap or Plug Blank = C  
NJ Cap or Plug (pressure only, no cryo) = D  
NJ Cap or Plug with 1/4" FPT (pressure only, no cryo) = E  
Pressure Plug with KF-25 Flange = E-25  
Protective Cover (usually plastic, vented) = P

### Product Number Examples:

VJ Plug, Blank for 1/2" Female Bayonet= B3049-FC  
VJ Cap for Male Bayonet with Pipe Outlet= B3049-MA

# Cryocomp Cryogenic Products

Cryocomp, a subsidiary of Cryofab, offers the specialized cryogenic and vacuum components you need to guarantee a reliable, efficient, long-life cryogenic system. Our valves and accessories are designed and fabricated to the highest standards for original equipment manufacturers involved in the fabrication and rehabilitation of:


- Vacuum-Insulated Pipe
- Cold boxes
- Tankage
- Helium Transfer Lines
- Flexible Lines
- Cryogenic Pumps
- Vacuum-Jacketed Manifolds
- Cryogenic Trailers
- Dewars
- Specialized Systems

At Cryocomp we strive for

**QUALITY**

**AVAILABILITY**

**REASONABLE PRICES**

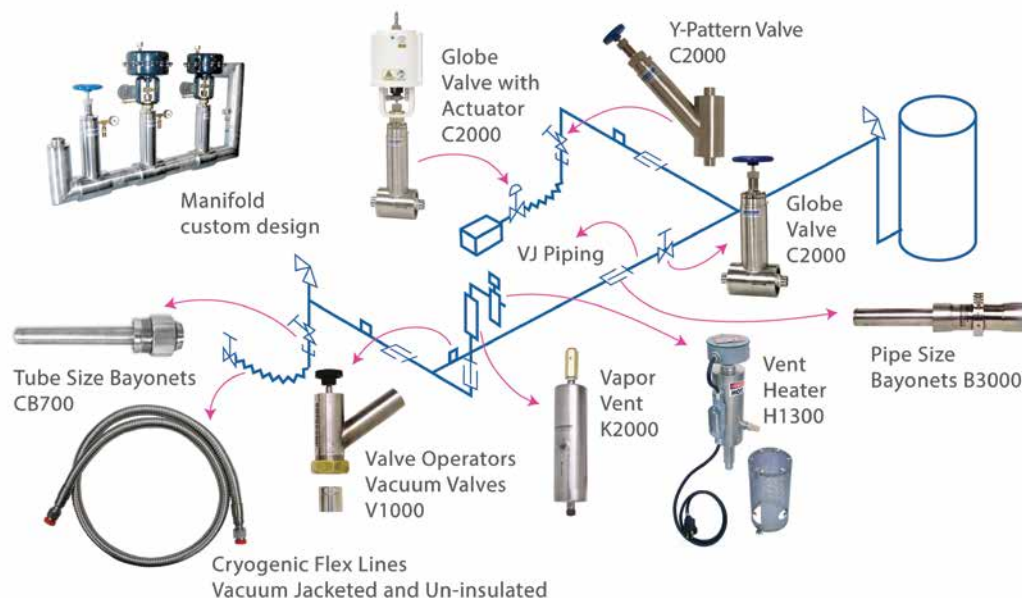

## Bayonet Installation

Vertical bayonets must be installed with the male above the female, no exceptions. (FIG. 1) For best thermal results it is necessary to have the flange or closure junction and seal at the upper most location and the cold interface at the bottom. This forms a gas pocket between the liquid interface and the O-ring which keeps the seal at a nearly ambient temperature.

Horizontal bayonet sets can be installed with the male either up stream or down stream. [FIG. 2] Industry convention has generally located the male upstream, but it does not physically or thermally make a difference. On all bayonets, be sure to lightly grease the O-ring seal with a system compatible grease. This allows the O-ring to establish a much tighter seal. With the CB700 style bayonets, be sure the knurled nut is tight to 5 to 10 ft-lbs.

For flanged bayonets, be sure to grease the O-ring seal with a system compatible grease.

After tightening the V-band tension nut, tap the outside of the strap at several points around the OD with a plastic hammer to firmly seat the "V" section on the flange and then re-torque the nut. (FIG. 3) Repeat this process at least 2 more times.




Fig. 1




Fig. 2




Fig. 3

**Contact us  
today  
for a quote**

[sales@cryocomp.com](mailto:sales@cryocomp.com)  
908.686.3643  
[www.cryocomp.com](http://www.cryocomp.com)



a division of Cryofab, Inc. 908.686.3643



Cryogenic Valves &  
Vacuum Components